PAC-125G

10-slot Full-size Compact Chassis

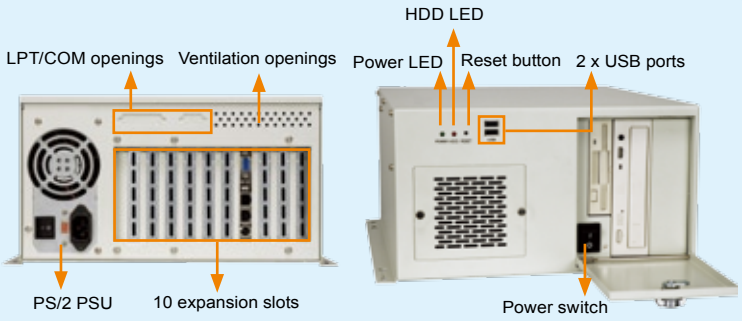

CD-ROM, and HDD are not included in package.

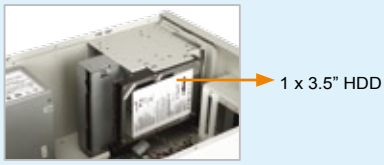

Features

- RoHS compliant design
- Two USB ports on the front panel
- One, 8 cm hot swappable cooling fan with fan filter
- 2 x 5.25", 1 x 3.5" HDD, 1 x front-accessible 3.5"
- Lockable door prevents unauthorized access

Specifications

Construction	Heavy duty metal
SBC Form Factor	Full-size, slot CPU card
Drive Bays	2 x 5.25"
	1 x front accessible 3.5"
	1 x 3.5" HDD
Cooling Fans	1 x 8cm
I/O Ports	2 x USB
I/O Openings	1 x LPT , 1 x COM
Expansion Slots	10 slots
Indicators	Power, HDD
Buttons	Power switch, reset
Operating Temperature	0°C~50°C
Operation Humidity	10% ~ 90%
Color	W: White
Weight (Net/Gross)	7.2 kg / 10.4 kg
Dimensions (DxWxH)	420 mm x 321 mm x 176 mm

Ordering Information

Part No.	Description
PAC-125GW-R22/A130A	10-slot Full-size Compact Chassis, White, 1 x 8cm fan, with ACE-A130A-RS (300W ATX model), RoHS
PAC-125GW-R22/ACE-925AP	10-Slot full Size chassis, White, W/ACE-925AP PSU (200W), RoHS
PAC-125GWPX-R22	10-Slot Full-size Chassis, White, for ATX Power Switch, W/O PSU, RoHS

Dimensions

measurement units: millimeter

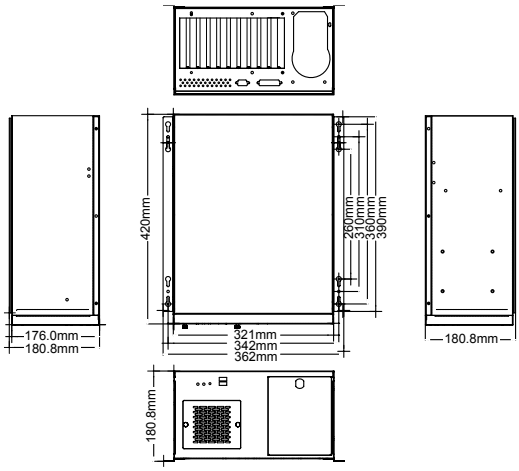

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe					PSU Connector
				x1	x4	x8	x16	PCIX	
BP-10S-RS	ISA	0	10	0	0	0	0	0	AT
PCI-10S-RS	PICMG 1.0	4	5	0	0	0	0	0	AT/ATX
PX-10S-RS	PICMG 1.0	7	3	0	0	0	0	0	AT/ATX
IP-8S-RS	PCISA	4	3	0	0	0	0	0	AT/ATX
IP-10S-RS	PCISA	4	5	0	0	0	0	0	AT/ATX
IPX-9S-RS	PCISA	8	0	0	0	0	0	0	AT/ATX
HPE-8S	PCI/PICOe	4	0	2	0	0	0	0	ATX
PE-6S	PICMG 1.3	2	0	2	0	0	1	0	ATX
PE-8S[1]	PICMG 1.3	3	0	3	0	0	1	0	ATX
SPXE-9S	PICMG 1.3	2	0	0	2	1	0	2	ATX
SPE-9S	PICMG 1.3	3	0	0	3	1	0	0	ATX

[1]Only R20 or later version can support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
ATX	ACE-A130A-RS	300W
	ACE-A140A-S-RS	400W
	ACE-A160A-RS	600W

PAC-125G can support single PS/2 PSU. For more models of IEI PSU, please refer to section 8 or visit www.ieiworld.com.