




CAN-8124 / CAN-8224

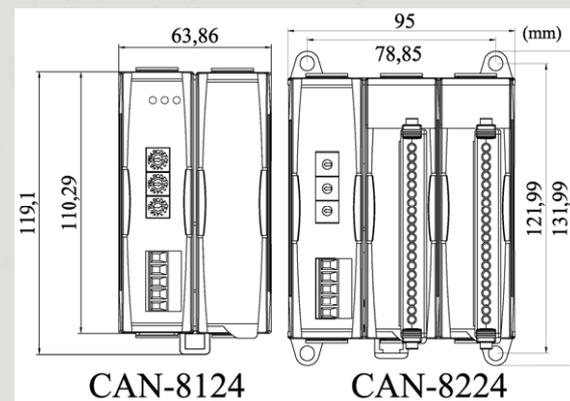


Dimensions

The CAN-8124/CAN-8224 main unit based on the modular design offers many good features to the users and provides more flexibility in data acquisition and control system. CAN-8124 and CAN-8224 are the DeviceNet Group 2 only Server devices. They are applied as the slaves in DevciceNet network. In addition, ICP DAS also presents a Utility tool to allow users to configure and create the EDS file for the specific IO modules plugged in. CAN-8124/CAN-8224 are specifically fit for the distribution system. With the hot-swap function, it is convenient for maintaining system.

Features


- Number of Nodes: 64 max.
- Baud Rate: 125, 250, 500 kbps
- Support Message Groups: Group 2 only Server
- I/O Operating Modes: Poll, Bit-Strobe, Change of State / Cyclic
- Device Heartbeat & Shutdown Message
- Produce EDS file Dynamically
- No. of Fragment I/O: 128 Bytes max. (Input / Output)
- MAC ID Setting by Rotary Switch
- Baud Rate Setting by Rotary Switch
- Status LED: NET, MOD, PWR
- Support Hot Swap and Auto-Configuration for high profile I-87K I/O Modules

Utility Features

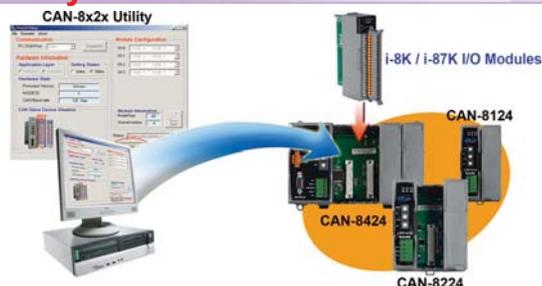


- Support I-8k/I-87K modules
- Show I/O modules configuration
- Show Application and assembly objects configuration
- Support IO connection path setting
- Support EDS file creating

Design Flowchart

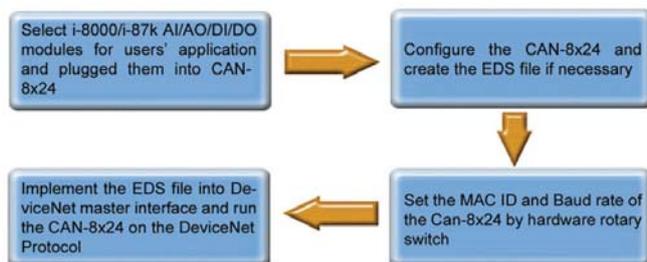

Pin Assignments

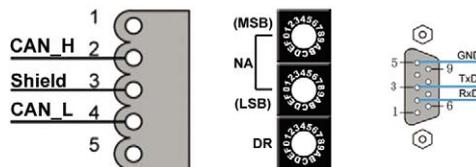

Rotary Switch Value(DR)	Baud rate (kbps)
0	125
1	250
2	500

ICP Electronics Australia Pty Ltd

TEL: 02 9457 6011
 sales@icp-australia.com.au
 www.icp-australia.com.au




Hardware Specifications

Model Name	CAN-8124	CAN-8224
Hardware		
CPU	80186, 80 MHz or compatible	
SRAM/Flash/EEPROM	512 KB / 512 KB / 16 KB	
NVRAM	31 bytes (battery backup, data valid for up to 10 years)	
RTC (Real Time Clock)	Yes	
Watchdog	Watchdog IC	
Expansion Slot	1 slots	2 slots
CAN Interface		
Controller	NXP SJA1000T with 16 MHz clock	
Transceiver	NXP 82C250	
Channel number	1	
Connector	5-pin screwed terminal block (CAN_GND, CAN_L, CAN_SHLD, CAN_H, CAN_V+)	
Baud Rate (bps)	125 k, 250 k, 500 k	
Transmission Distance (m)	Depend on baud rate (for example, max. 500 m at 125 kbps)	
Isolation	3000 V _{DC} for DC-to-DC, 2500 V _{rms} for photo-couple	
Terminator Resistor	Jumper for 120 Ω terminator resistor	
Specification	ISO-11898-2, CAN 2.0A	
Protocol	DeviceNet Volumn I ver2.0, Volumn II ver2.0 Predefined Master/Slave Connection set	
LED		
Round LED	PWR LED, NET LED, MOD LED	
Power		
Power supply	Unregulated +10 ~ +30 V _{DC}	
Protection	Power reverse polarity protection, Over-voltage brown-out protection	
Power Consumption	1.7 W	2 W
Mechanism		
Installation	DIN-Rail	DIN-Rail or Wall Mounting
Dimensions	64mm x 119mm x 91mm (W x L x H)	95mm x 132mm x 91mm (W x L x H)
Environment		
Operating Temp.	-25 ~ 75 °C	
Storage Temp.	-30 ~ 80 °C	
Humidity	10 ~ 90% RH, non-condensing	


LED Indicators

LED	Description
PWR	Indicate the status of power supply
MOD	Indicate the main or modules status
NET	This LED indicates the DeviceNet network status

Application

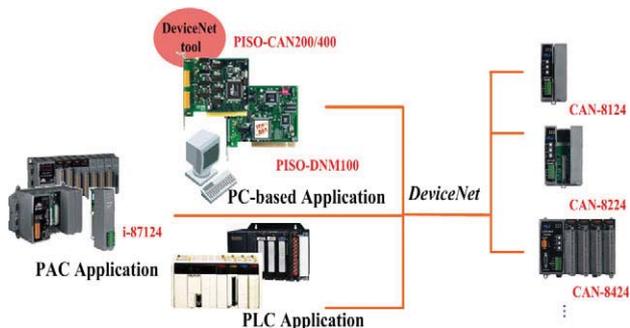

Hot Swap & Auto-configuration

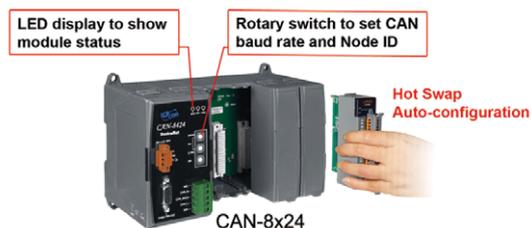

Ordering Information

CAN-8124	DeviceNet remote I/O unit with 1 empty slot
CAN-8224	DeviceNet remote I/O unit with 2 empty slot