

# ACE-A622B


220 W 1U Type ATX Power Supply



## Specifications

<b>Input Type</b>	90~264 VAC Full Range						
<b>Output Voltage</b>	<b>+3.3 V</b>	<b>+5 V</b>	<b>+12 V</b>	<b>+12 V 2</b>	<b>-12 V</b>	<b>+5 Vsb</b>	<b>+5 Vsb</b>
	10 A (0.1 A min.)	14 A (0.2 A min.)	14 A (0.6 A min.)		0.3 A	2.5 A	2.5 A
<b>Efficiency</b>	85%						
<b>Temperature</b>	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C						
<b>MTBF (hrs)</b>	100,000						
<b>Output Connector</b>	20+4-pin ATX, 4-pin 12V CPU, 2 x HDD, 2 x SATA						
<b>Dimensions (mm)</b>	150 x 81.5 x 40.5						

## Dimensions (Unit: mm)

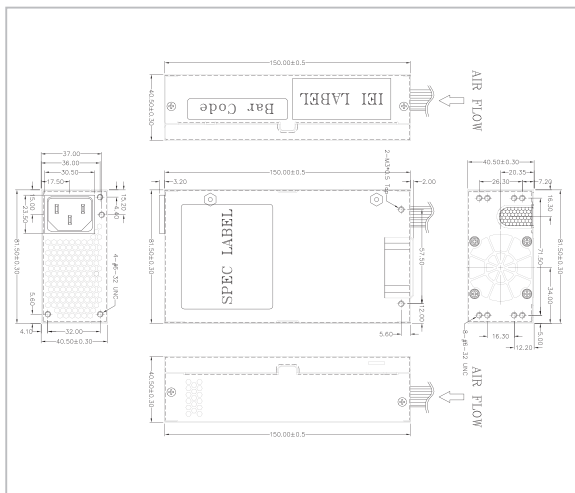

## Ordering Information

Part No.	Description
ACE-A622B-RS-R10	1U Flex ATX 220W Power Supply, 90~264VAC, ErP, CCL, RoHS

# ACE-A618B


180 W 1U Type ATX Power Supply



## Specifications

<b>Input Type</b>	90~264 VAC Full Range				
<b>Output Voltage</b>	<b>+3.3 V</b>	<b>+5 V</b>	<b>+12 V</b>	<b>-12 V</b>	<b>+5 Vsb</b>
	10 A (0.1 A min.)	14 A (0.2 A min.)	10 A (0.6 A min.)	0.3 A	2.5 A
<b>Efficiency</b>	85%				
<b>Temperature</b>	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C				
<b>MTBF (hrs)</b>	100,000				
<b>Output Connector</b>	20+4-pin ATX, 4-pin 12V CPU, 1 x FDD, 1 x HDD, 2 x SATA				
<b>Dimensions (mm)</b>	150 x 81.5 x 40.5				

## Dimensions (Unit: mm)

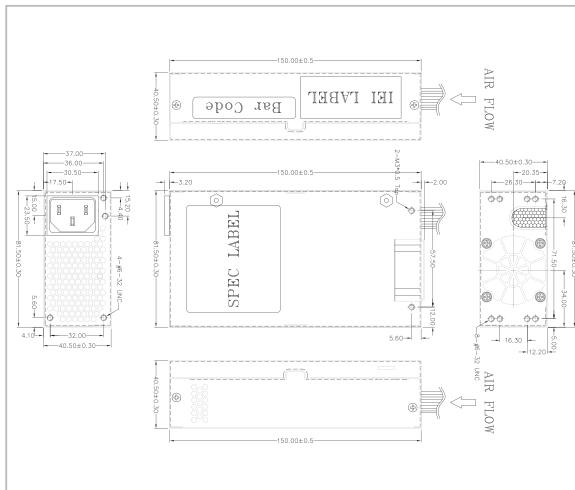

## Ordering Information

Part No.	Description
ACE-A618B-RS-R10	1U Flex ATX 180W Power Supply, 90~264VAC, ErP, CCL, RoHS