



### Features

- 15" steel enclosure industrial displa
- IP65 compliant front bezel
- OSD at front side
- VESA mount 75 x 75
- Anti-reflection glass in front for protection (optional touch panel)
- Default AC 100~240V input, optional DC 11~32V input
- Default: VGA input, Optional: DVI, RCA, and S-Video input



### Specifications

#### I/O Port

Outside I/O port	<b>Default:</b> VGA input AC 100~240V input <b>Option (reserved):</b> DVI RCA S-Video Touch I/O 3-pin terminal block for DC 11~32V input
------------------	--

OSD control	OSD on the front side default, OSD on the rear side for option
-------------	--

#### LCD

Display Type	15" TFT LCD
Max. Resolution	1024 x 768
Max. Color	262K
Contrast Ratio	800: 1
View Angle	160 (H) / 160 (V)
Backlight Lifetime	30,000 hrs
Luminance (cd/m <sup>2</sup> )	420 nits

#### Power

Power Input	AC input / DC 11~32V optional
Power Consumption	MAX: 12W


#### Touch Screen – Resistive Type (Option)

Interface	USB / RS-232
Light Transmission	Over 80%

#### Mechanical

Construction	Black Steel Front Panel Option Front Bezel : 304 S.S. / 316L S.S. / Aluminum Chassis Black Steel Back Cover
Mounting	Panel mount / VESA mount 75 x 75 / Rack Mount (Option)
IP Rating	Front side IP65
Dimensions	409 x 309 x 64.7 mm
Net Weight	6.2 Kg

### Dimension

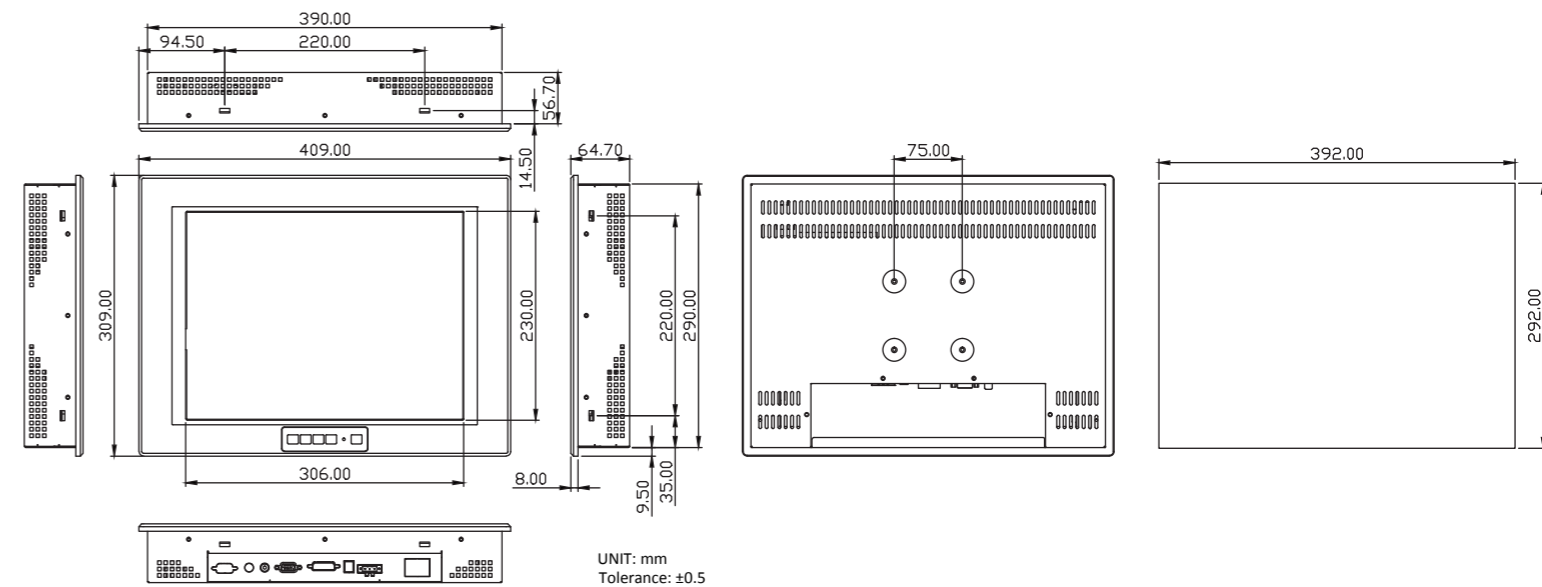

#### Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A

#### Ordering Information

ADP-1154-15	15" XGA industrial display, VGA input, 5 keys front OSD, AC 100~240V power input, no touch with protective glass, steel enclosure
-------------	---

ICP Electronics  
Australia Pty Ltd

TEL: 02 9457 6011  
sales@icp-australia.com.au  
www.icp-australia.com.au

