



## Features

- 10.1" LCD Panel
- Flat Front Panel with IP65 Design
- Solid Aluminum Die-casting Chassis
- Intel Atom N2600 processor, Dual Core Low Power Fanless System

## Specifications

System	
CPU	Intel Atom Cedar View N2600 1.6GHz Dual Core Processors / Intel Atom D2550 1.8GHz(Optional)
System Chipset	Intel NM10
System Memory	Onboard DDR3 2GB 800 MHz / 4GB (Optional)

IO Port	
USB	2 x USB 2.0 type A, USB4/5
Serial/Parallel	1 x RS-232/422/485 DB-9, COM1, Default RS-232 1 x RS-232 DB-9, COM2
Audio	1 x Line out phone jack
LAN	2 x GbE RJ-45
Power	3 pins terminal block connector, DC Power input
Option	2 x RS-232 DB-9 + 1 x Mini-PCIe slot via TB-528C2ME1 2 x CAN bus via TB-528CAN2 2 x USB 2.0 type A via TB-528U2 (2 x USB 2.0 type A + 1 x Mini-PCIe slot + 1 x RS-232 DB-9 via TB-528C1U2

Storage Space	
HDD	1 x 2.5" SATA 2
Movable device	1 x Internal SD slot


Expansion	
Expansion Slot	1 x Internal Mini-PCIe half size

Display	
Display Type	10.1" TFT-LCD
Max. Resolution	1280x800
Max. Color	262K
Luminance (cd/m <sup>2</sup> )	350
Viewing Angle (Degree)	160/160

Touch screen	
Type	Resistive Touch / Projected Capacitive Touch (for P model)
Interface	RS-232 / USB (for P model)
Light Transmission(%)	80% / 90% (for P model)

Power	
Power Input	9~36V DC
Power Consumption	Max: 11W

## Dimensions

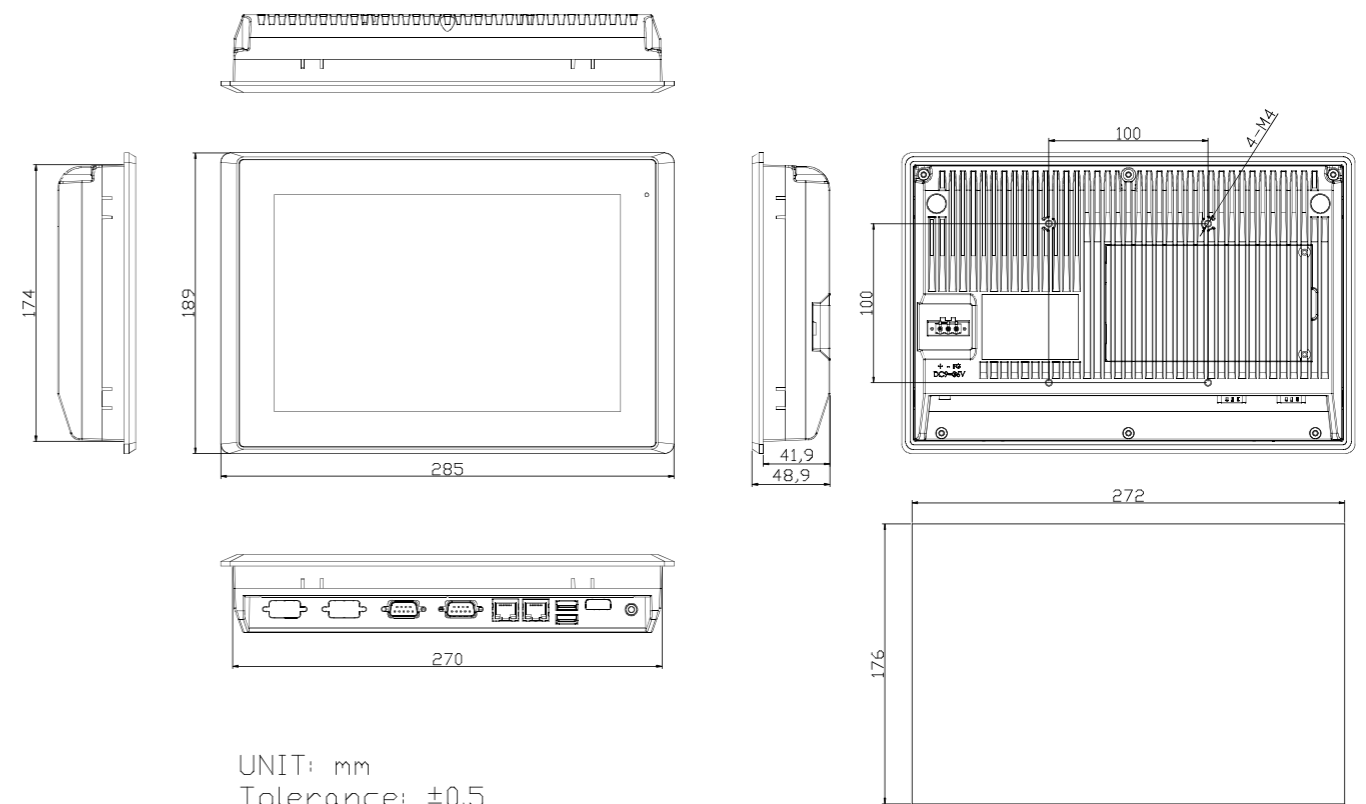

Mounting Hole Size

Mechanical	
Construction	Sliver aluminum front bezel and chassis
IP Rating	IP65 front panel
Mounting	Panel mounting, VESA 100 x 100
Dimensions (WxHxD)	285mm x 189mm x 48.9mm
Net Weight (Kgs)	2.1

Environmental	
Operating Temperature	0~50°C, -20~60°C (option)
Storage Temperature	-20~60°C
Storage Humidity	10 to 90%@ 40°C, non-condensing
Certificate	CE / FCC Class A / UL

Operating System Support	
Windows XP pro	
Windows XP Embedded	
Windows Embedded CE6.0	
Windows 7 32-bit pro for Embedded	
Windows Embedded standard 7 32-bit	
(Win 7 32-bit support 3D Graphic function)	

Ordering Information	
ARCHMI-710	10.1"WXGA 1280 x 800 fanless HMI with Atom N2600 1.6G CPU, 2GB DDR3 memory, touch window resistive touch screen, 9~36V DC input with adapter, Aluminum chassis.
ARCHMI-710P	10.1"WXGA 1280 x 800 fanless HMI with Intel N2600 1.6G CPU, 2GB DDR3 memory, projected capacitive touch, 9~36V DC input with adapter, Aluminum chassis.

ICP Electronics  
Australia Pty Ltd

TEL: 02 9457 6011  
sales@icp-australia.com.au  
www.icp-australia.com.au

