



Features


- 15" Industrial Compact Size Panel PC
- Flat front panel touch screen
- Fanless design
- Intel Celeron N2930(1.83GHz) CPU built-in
- Onboard 4GB DDR3L 1333 MHz/8GB(option)
- Wide range DC 9~36V power input
- IP66 compliant front panel
- Optional projected capacitive touch screen support 7H anti-scratch surface
- High brightness 1,000nits LCD for ARCHMI-816(P)H
- Optical bonding and XGA 1024 x 768 resolution LCD for option
- Auto dimming for option for ARCHMI-816(P)H



Specifications

System		
CPU	Onboard Intel Celeron N2930(1.83GHz) Processor	
System Chipset	SoC	
Memory	Onboard 4GB DDR 3L 1333 MHz/8GB(option)	
IO Port		
USB	2 x USB 3.0 type A	
Serial/Parallel	1 x RS-232 DB-9, COM2 1 x RS-232/422/485 DB-9, COM1, default RS-232	
Audio	1 x Audio Line Out	
LAN	2 x GbE LAN RJ-45 with Intel 82574L controller	
Power	1 x 3-pin DC power input terminal 1 x 2-pin connector for power on/off button	
Option	2 x RS-232 DB-9 + 1 x Mini-PCIe slot via TB-528C2ME1 2 x CAN bus via TB-528CAN2 2 x USB 2.0 type A Via TB-528U2 2 x USB 2.0 type A + 1 x RS-232 DB-9 + 1 x Power button via TB-528C1U2P1 UPS Battery 21W/10.8V/1.95Ah(3S1P) <i>UPS battery and TB-528 expansion board can't be used in the same time</i>	
Storage Space		
HDD	1 x SATA 2.5" HDD bay for SATA HDD (easy accessible)	
movable device	1 x SD card slot, up to 32GB	
Expansion		
Expansion Slot	1 x Internal Mini-PCIe slot full size	
Display		
	ARCHMI-816(P)	ARCHMI-816(P)H
Display Type	15.6" TFT-LCD	15.6" TFT-LCD
Max. Resolution	1366 x 768	1366 x 768
Max. Color	16.7M	16.7M
Luminance (cd/m ²)	300	1000
Viewing Angle	160(H) / 160(V)	160(H) / 160(V)
Contrast Ratio	500 : 1	500 : 1
Backlight Lifetime	50,000 Hrs	50,000 Hrs
Touch Screen		
Type	Resistive Touch Window Projected Capacitive Touch (For P Model)	
Interface	USB	
Light Transmission(%)	Resistive Touch Window: over 80% Projected Capacitive Touch: over 90%	
Power		
Power Input	DC 9~36V	
Power Consumption	ARCHMI-816: MAX: 20.2W / ARCHMI-816P: MAX: 18.1W ARCHMI-816H: MAX: TBD / ARCHMI-816PH: MAX: TBD	

Dimensions

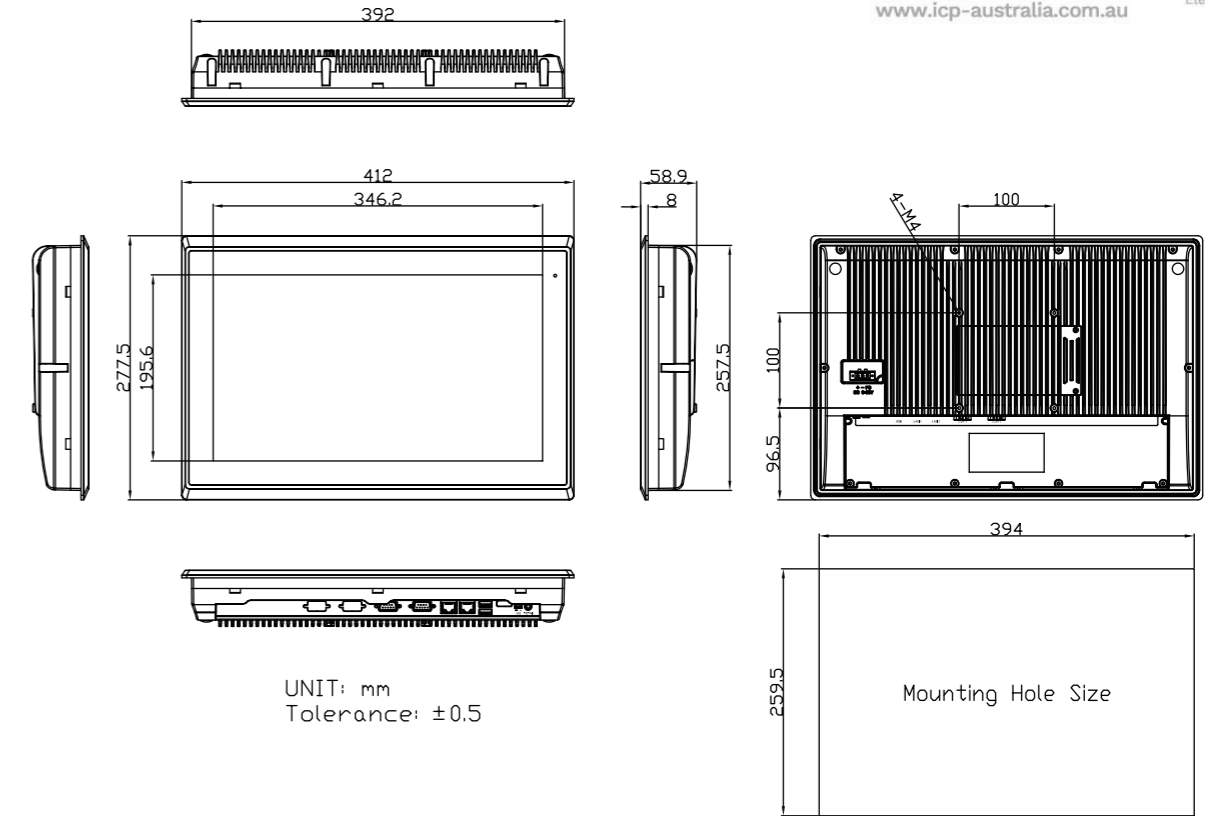

ICP Electronics
Australia Pty Ltd

TEL: 02 9457 6011
sales@icp-australia.com.au
www.icp-australia.com.au



Mechanical	
Color	RAL 9007
Construction	Aluminum Die-casting Front Bezel and Chassis
Mounting	Panel Mounting, VESA 100 x 100
IP Rating	IP66 compliant front bezel
Dimensions	412 x 277.5 x 58.9 mm
Net Weight	ARCHMI-816(P): 4.8 Kg ARCHMI-816(P)H: TBD
Environmental	
Operating Temperature	ARCHMI-816(P): 0~50°C, -20~60°C (option) ARCHMI-816(P)H: 0~50°C
Storage Temperature	-20~60°C
Storage Humidity	10 to 90% @ 40°C, non-condensing
Certificate	CE / FCC CLASS A / UL
Operating System Support	
Windows Embedded Compact 7, Windows Embedded Standard 7, Windows 7 Pro(FES), Windows 7 Ultimate(FES), Windows Embedded 8 Standard, Windows Embedded 8.1 Industry Pro, Windows 10 IoT Enterprise 2015LTSP	
Ordering Information	
ARCHMI-816-01	15.6" WXGA Fanless HMI barebone with Intel Celeron N2930 1.83GHz CPU, 2GB DDR3L RAM, Resistive touch screen, DC 9~36V input with adapter, Aluminum chassis
ARCHMI-816P-01	15.6" WXGA Fanless HMI barebone with Intel Celeron N2930 1.83GHz CPU, 2GB DDR3L RAM, Projected capacitive touch screen, DC 9~36V input with adapter, Aluminum chassis
ARCHMI-816H-01	15.6" WXGA Fanless HMI barebone with Intel Celeron N2930 1.83GHz CPU, 4GB DDR3L RAM, Resistive touch screen, DC 9~36V input with adapter, Aluminum chassis, High brightness 1,000nits LCD
ARCHMI-816PH-01	15.6" WXGA Fanless HMI barebone with Intel Celeron N2930 1.83GHz CPU, 4GB DDR3L RAM, Projected capacitive touch screen, DC 9~36V input with adapter, Aluminum chassis, High brightness 1,000nits LCD