


Features

- 15.6" Industrial Compact Size Panel PC
- Intel 4th Gen. Core i3 CPU built-in/ i5(option)
- Onboard 4GB DDR3L 1600MHz/ 8GB(option)
- Flat Front Panel Touch Screen and Fanless Design
- DC 9~36V Wide Range Power Input
- IP66 Compliant Front Panel
- Optional Projected Capacitive Touch Screen Support 7H Anti-Scratch Surface

Specifications

System	
CPU	Onboard Intel 4th Gen. Core i3 CPU Processors / i5(option)
System Chipset	SoC
Memory	Onboard 4GB DDR3L 1600MHz/ 8GB(option)
I/O Port	
USB	2 x USB 3.0 type A
Serial / Parallel	1 x DB-9 RS-232/422/485, COM1 (Default RS-232) 1 x RS-232 DB-9, COM2
Audio	1 x Audio Line Out
LAN	2 x GbE LAN RJ-45
Power	1 x 3-pin terminal block connector 1 x 2-pin power switch connector
Option	2 x RS-232 DB-9 + 1 x Mini-PCIe slot via TB-528C2ME1 2 x CAN bus via TB-528CAN2 2 x USB 2.0 type A + 1 x RS-232 DB-9 + 1 x Power button via TB-528C1U2P1 2 x USB 2.0 type A + via TB-528U2 UPS Battery 21W/10.8V/1.95Ah(3S1P) UPS Battery and TB-528 expansion board can't be used in the same time
Storage Space	
HDD	1 x 2.5" SATA2 HDD space
Expansion	
Expansion Slot	1 x Internal Mini-PCIe slot full size
Display	
Display Type	15.6" TFT-LCD
Max. Resolution	1366 x 768
Max. Color	16.7M
Luminance (cd/m ²)	300
View Angle	160(H) / 160(V)
Contrast	500:1
Backlight Lifetime	50,000 hrs
Touch Screen	
Type	Resistive Touch Window Projected Capacitive Touch (For P Model)
Interface	USB
Light Transmission(%)	Resistive Touch Window: over 80% Projected Capacitive Touch: over 90%
Power	
Power Input	DC 9~36V
Power Consumption	ARCHMI-916P: 52W

Dimensions

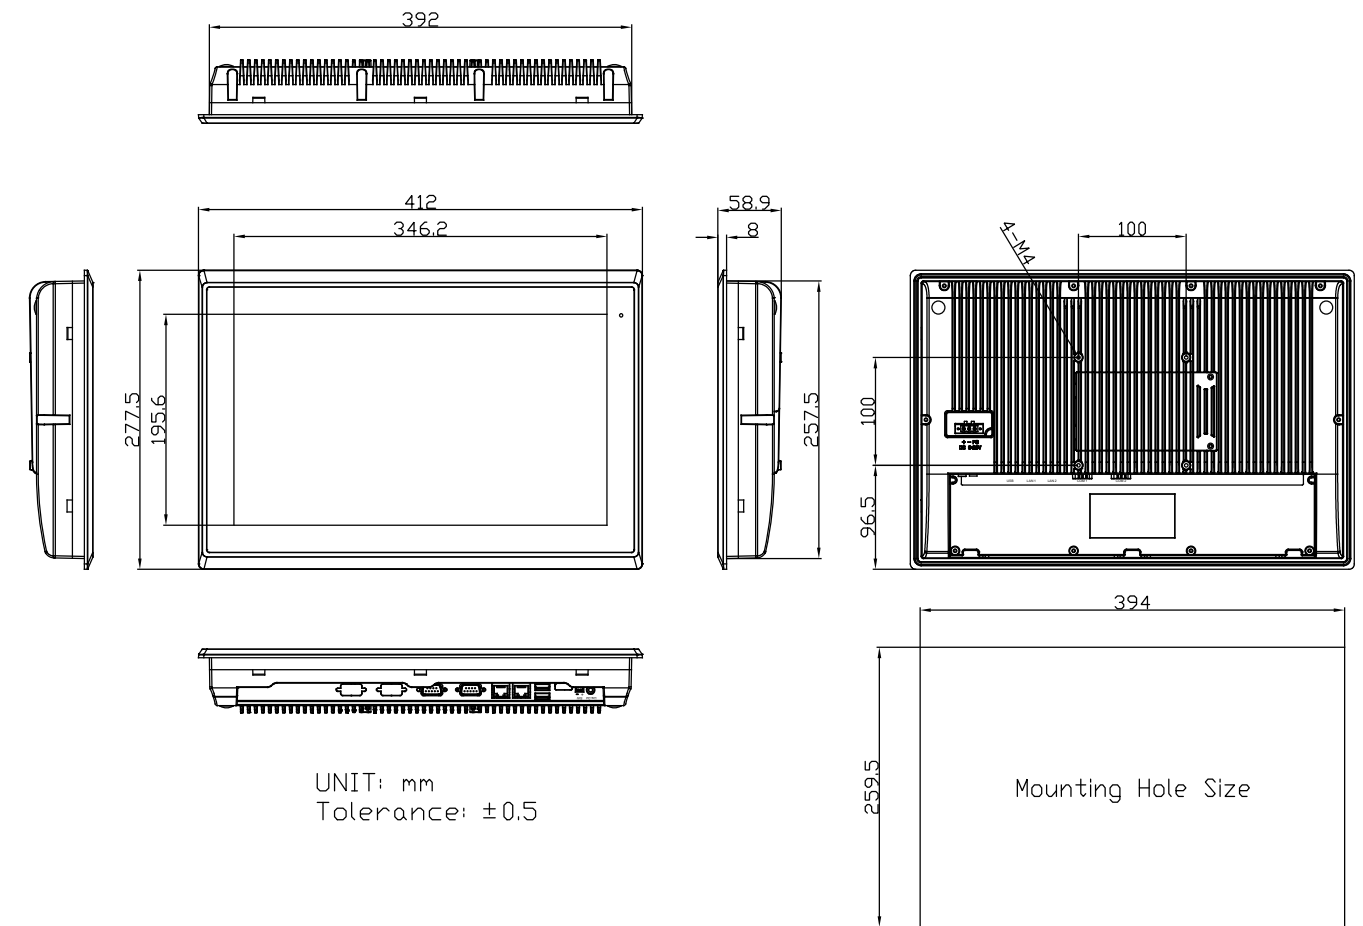

Mechanical	
Color	RAL 9007
Construction	Aluminum Die-casting Chassis
Mounting	Panel Mount, VESA 100 x 100
Dimensions (WxHxD)	412mm x 277.5mm x 58.9mm
IP Rating	IP66 Compliant Front Bezel
Net Weight	5.0 kg
Environmental	
Operating Temperature	0~50°C
Storage Temperature	-30~70°C
Storage Humidity	10 to 90%@ 40°C, non-condensing
Certificate	CE/FCC Class A/CB/UL
Operating System Support	
Windows 7, WEC 7, Windows 8.1, Windows 10	
Ordering Information	
ARCHMI-916-01	15.6" WXGA Fanless HMI barebone with Intel Core i3 CPU, 4GB DDR3 RAM, Resistive touch screen, 9~36V DC input with adapter, Aluminum chassis
ARCHMI-916P-01	15.6" WXGA Fanless HMI barebone with Intel Core i3 CPU, 4GB DDR3 RAM, Projected Capacitive touch screen, 9~36V DC input with adapter, Aluminum chassis