


SMB-2600

Intel Gen 4/5 Core i CPU with HD 6000 GPU with 2xLAN/ HDMI/ DVI/ VGA DC 12V

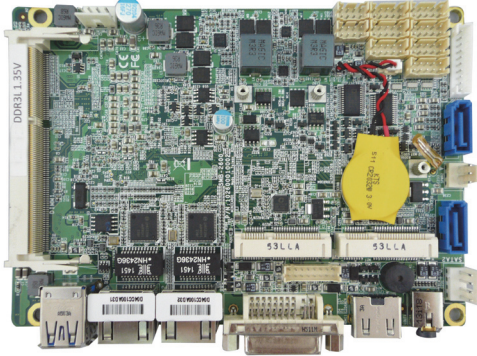

- Intel Gen5 CPU
- DDR3L 1600
- DVI / HDMI
- DC 12V
- Dual GbE Lan

Features

- Intel Core i7-5650U / Core i3-5010U
- Triple Display Output (DVI / HDMI / VGA)
- Dual Gigabit Ethernet and 4 x COM Ports
- Wide Range Operating Temp. : -30~60°C
- Compact Size and Fanless
- DC 12V Power Input

System

CPU	Intel Gen 5 Core i7-5650U 2.2GHz up to 3.1GHz Intel Gen 5 Core i3-5010U 2.1GHz Intel Gen 4 Core i7-4650U 1.7GHz up to 3.3GHz Intel Gen 4 Core i5-4300U 1.9GHz up to 2.9GHz Intel Gen 4 Core i3-4010U 1.7GHz Intel Gen 4 Dual Core Celeron 2980U 1.6GHz
Memory	1 x DDR3L-1600 SO-DIMM up to 8GB
Chipset	N/A
Graphics	Intel HD Graphics
ATA	2 x Serial ATA ports with 6Gb/s HDD Transfer Rate
LAN Chipset	2 x Intel i210-AT Gigabit Ethernet
Watchdog	1 ~ 255 Level Reset

I/O

Serial Port	4 x RS-232 Ports (2 x RS232/422/485)
USB Port	2 x USB 3.0 and 2 x USB 2.0 Ports
LAN	2 x RJ45 Ports for GbE
Video Port	HDMI/DVI/VGA(Through DVI-I)
GPIO Port	4 In and 4 Out GPIO Ports (5V Level)
Audio	Line-Out / Mic-In
Expansion Bus	2 x Mini-card Slots

Storage

Type	2 x SATA Interface for Hard Disk Drive / SSD
-------------	--

Power Requirement

Power Input	DC 12V Input
--------------------	--------------

I/O Panel

LAN Port	2 x Intel Gigabit Ethernet
Audio Port	1 x Line-out
Graphics Port	1 x DVI-I and 1 x HDMI
USB Port	2 x USB 3.0

Software

Operating System	Windows 8.1 32/64, Windows 7 32/64, WES 7, Linux 3.8.X
-------------------------	--

Environmental & Mechanical

Dimensions	146 x 102 mm
Operating Temp.	-30 ~ 60°C, ambient w/ air
Storage Temp.	-40 ~ 85°C
Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
Certifications	CE, FCC Class A

Ordering Information

Part Number	SMB-2600-000-C1/i3/i5/i7/C1B/i3B/i7B
Description	Intel Gen 4/5 Core i CPU with HD 6000 GPU with 2xLAN/ HDMI/ DVI/ VGA DC 12V

ICP Electronics
Australia Pty Ltd

TEL: 02 9457 6011
sales@icp-australia.com.au
www.icp-australia.com.au

