

VPD-130-H

VPD-130N-H

## Features

- Excellent C/P ratio (cost/performance)
- High-resolution color touch screen
- RTC (Real Time Clock)
- Supports 1 Serial Port (RS-232/RS-485, including Self-Tuner)
- Rubber Keypad
- GUI design
- Free HMIWorks development tool
- Supports the popular C programming language and Ladder Designer
- Supports the custom communication protocol (C language)
- ESD Protection: 4 kV
- Operating temperature: -20 ~ 50°C
- Front Panel: IP65 Waterproof





## Introduction

VPD industrial touch HMI device series features, 3.5" high resolution color touch screen LCD. With touchscreen capability, it is easy to deploy into all kinds of automation systems, and make them more intuitive and efficient. Either setup new system installations or complete system retrofits, VPD series stands out for its wide variety of communication methods. Its built-in communication ports include RS-232/RS-485, and USB interface, enable integration into the system allowing users to control, monitor I/O at the remote sides and update firmware directly from the central computer. Besides, the built-in non-volatile storage makes VPD series more reliable for rugged environments.

HMIWorks, the free development software for VPD series, provides an easy-to-use environment, and powerful and intuitive programming with graphic capabilities to let users create appealing graphical interface screens in minutes. For PLC users, HMIWorks provides Ladder Designer and C language environment for IT users. Especially, it only takes no more than 30 minutes to learn how to create an application program when using Ladder Designer. With all the features provided, VPD series touch HMI Devices must be the most cost effective HMI Device ever been in the market.

## Applications

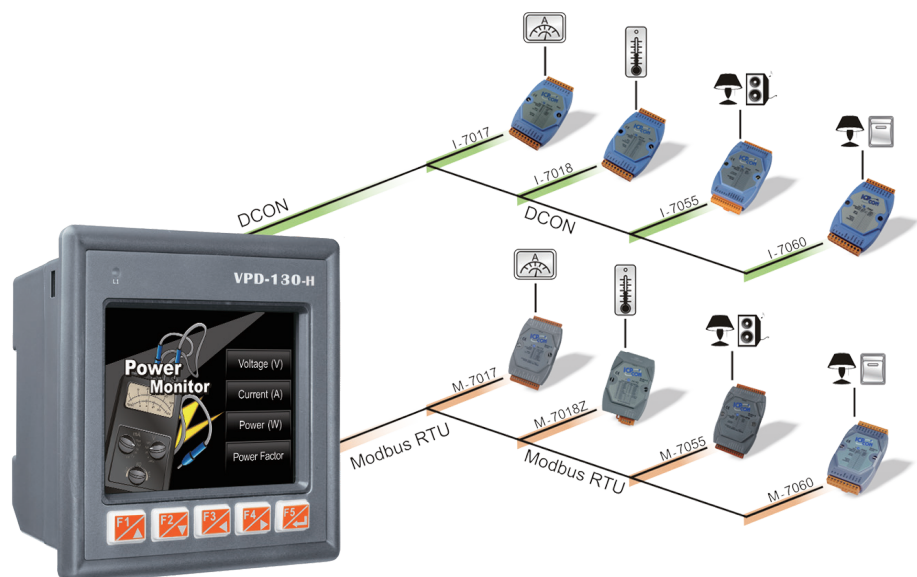

## Applications

**Status Display**

**Presentations**

**Factory/Machine Automation**

**User-defined HMI**

**Power Monitor**

- Voltage (V)
- Current (A)
- Power (W)
- Power Factor

**Schedule Management with Built-in RTC**

**Multi-display**

**Multi-page Design**

**Setting** **HMIWorks**  
Industrial Computer Product  
Data Acquisition System

	Time	Shutdown	Cumulative Time
1	120 <sub>m</sub>	Start	120 <sub>m</sub> Reset
2	120 <sub>m</sub>	Start	120 <sub>m</sub> Reset
3	120 <sub>m</sub>	Start	

**HMIWorks**  
Industrial Computer Product  
Data Acquisition System

1 120<sub>m</sub> Remaining

2 120<sub>m</sub> Remaining

3 120<sub>m</sub> Remaining

26°C

Setting curr. val. 2010/03/23 110 V 11:25:25

## Applications

### Operator Interface



### Alarm




## Specifications

Models	VPD-130-H	VPD-130N-H
CPU Module		
CPU	32-bit RISC CPU	
Memory Expansion	16 MB SDRAM / 16 MB Flash	
Real Time Clock (RTC)	Yes	
Buzzer	Yes	
Rotary Switch (0~9)	Yes	
Communication Interface		
Serial Port	x 1 (RS-232/RS-485 including Self-Tuner)	
USB 1.1 Client	Firmware update only	
I/O Expansion		
I/O Expansion Bus	Yes	
MMI (Main Machine Interface)		
LCD	3.5" TFT (Resolution 240 x 320 x 16), defective pixels <= 3	
Backlight Life	20,000 hours	
Brightness	270 cd/m2	
LED Indicator	Yes	-
Touch Panel	Yes	
Reset Button	Yes	
Rubber Keypad	5 keys (Programmable)	-
Electrical		
Powered from Terminal Block	+12 ~ 48 VDC	
Powered from PoE	-	
Power Consumption	2 W	
Mechanical		
Dimensions (W x L x H)	103 mm x103 mm x 53 mm	
Ingress Protection	Front Panel: IP65	
Installation	DIN-Rail Mounting and Panel Mounting	
Environmental		
Operating Temperature	-20 ~ +50°C	
Storage Temperature	-30 ~ +80°C	
Ambient Relative Humidity	10 ~ 90% RH, non-condensing	



## Pin Assignments

### VPD-130-H/VPD-130N-H

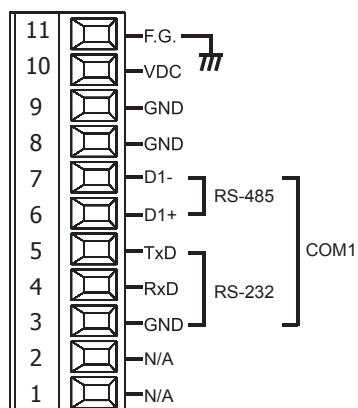

## Appearance


### VPD-130-H Front View




### VPD-130N-H Front View



### VPD-130-H/VPD-130N-H Top View

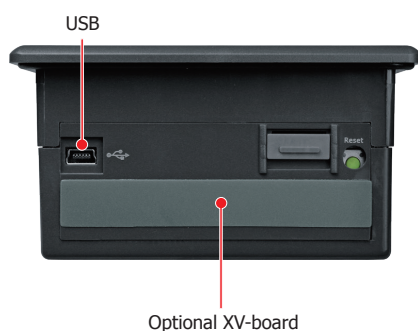




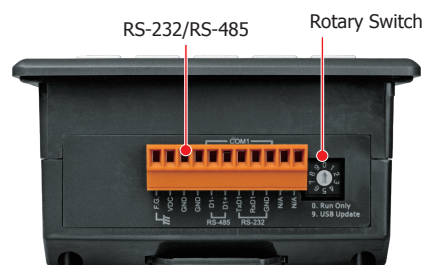



### VPD-130-H/VPD-130N-H Bottom View

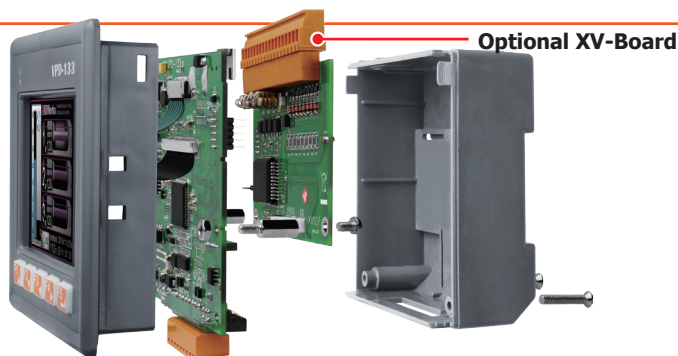


## XV-Board Assembly Drawing

**Making VPD series  
have its own I/O to control!**




DIO Board						Relay Output Board	
Model	XV107	XV107A	XV110	XV111	XV111A	XV116	
Image							
Digital Input							
Channel		8	8	16		5	
Contact		Wet	Wet	Dry+Wet		Wet	
Sink/Source (NPN/PNP)		Source	Sink	Sink/Source		Sink/Source	
Wet Contact	On Voltage Level	+3.5 Vdc ~ +50 Vdc				+3.5 Vdc ~ +50 Vdc	
	Off Voltage Level	+1 Vdc Max.				+1 Vdc Max.	
Dry Contact	On Voltage Level	-		Close to GND		-	
	Off Voltage Level	-		Open		-	
Counters	Channels	8		16		5	
	Max. Count	32-bit (0 ~ 4, 294, 967, 285)				32-bit (0 ~ 4, 294, 967, 285)	
	Max. Input Frequency	50 Hz				50 Hz	
	Min. Pulse Width	10 ms				10 ms	
Input Impedance		10 KΩ, 0.5 W				10 KΩ, 0.5 W	
Overvoltage Protection		70 Vdc				70 Vdc	
Digital Output							
Channel		8			16		
Type		Open Collector	Open Emitter		Open Collector	Open Emitter	
Sink/Source (NPN/PNP)		Sink	Source		Sink	Source	
Load Voltage		+3.5 Vdc ~ 50 Vdc	+10 Vdc ~ 40 Vdc	-	+3.5 Vdc ~ 50 Vdc	+10 Vdc ~ 40 Vdc	
Max. Load Current		700 mA/channel	650 mA/channel		600 mA/channel		
Overload Protection		1.4 A			1.4 A		
Relay Output							
Channel						2 (channel0, 1)	4 (channel 2~5)
Type						Signal Relay	Power Relay
Form A Relay	Contact Rating					2 A @ 30 VDC 0.24 A @ 220 VDC 0.25 A @ 250 VAC	6 A @ 35 VDC 6 A @ 240 VAC
	Min. Contact Load					10 mA @ 20 mV	100 mA @ ≥ 12 V
	Contact Material					Silver Nickel, Gold-covered	Silver Cadmium Alloy
	Operate Time					3 ms (typical)	5 ms (typical)
	Release Time					4 ms (typical)	1 ms (typical)
	Mechanical Endurance					10 <sup>8</sup> ops.	30 X 10 <sup>6</sup> ops.
	Electrical Endurance					2 X 10 <sup>5</sup> ops.	1 X 10 <sup>5</sup> ops.
Isolation							
Intra-module Isolation, Field to Logic		3750 Vdc					
Power Requirements							
Consumption		0.15 W	0.45 W	0.25 W	0.2 W	0.8 W	1.2 W


Multifunction Board				
Model	XV306	XV307	XV308	XV310
Image				
Analog Input				
Channel	4	-	8	4
Sensor Type	+/- 1 V, +/- 2.5 V, +/- 5 V, +/- 10 V, 0 ~ 20 mA, 4 ~ 20 mA, +/-20 mA ( Jumper selectable )		+/- 1 V, +/- 2.5 V, +/- 5 V, +/- 10 V, 0 ~ 20 mA, 4 ~ 20 mA, +/-20 mA ( Jumper selectable )	
Resolution	16-bit		16-bit	
Sampling Rate	Normal Mode		10 Hz	
	Fast Mode		200 Hz	
Input Impedance	20 MΩ		20 MΩ	
Overvoltage Protection	120 VDC		120 VDC	
Analog Output				
Channel	-	2	-	2
Range		0 V ~ +5 V, ±5 V, 0 V ~ +10 V, ±10 V, 0 mA ~ +20 mA, +4 mA ~ +20 mA (Jumper Selectable)		0 V ~ +5 V, ±5 V, 0 V ~ +10 V, ±10 V, 0 mA ~ +20 mA, +4 mA ~ +20 mA (Jumper Selectable)
Resolution		12-bit		12-bit
Voltage Output Capability		10 V @ 20 mA		10 V @ 20 mA
Current Load Resistance		500 Ω		500 Ω
Universal Digital Input/Output				
Channel	-	DI+DO=8 (by Wire)	-	
Digital Input				
Channel	4	-	4	
Sink/Source (NPN/PNP)		Sink/Source	Source	
Wet Contact	On Voltage Level	+3.5 ~ +50 VDC	+1 VDC Max.	-
	Off Voltage Level	+1 VDC Max.	+4 ~ 30 VDC	-
Dry Contact	On Voltage Level	-	Close to GND	Close to GND
	Off Voltage Level	-	Open	Open
Counters	Max. Count	32-bit (0~4,294,967,285)		
	Max. Input Frequency	50 Hz		
	Min. Pulse Width	10 ms		
Overload Protection	70 Vdc	60 VDC	60 VDC	
Digital Output				
Channel	4	-	4	
Type	Power Relay (Form A)	Sink	Source	
Load Voltage	-	3.5 ~ 50 VDC	+10 ~ +40 VDC	
Max. Load Current		700 mA	650 mA/channel	
Overload Protection		60 VDC	47 VDC	
Contact Rating		6 A @ 35 VDC 6 A @ 240 VAC	-	-
Min. Contact Load	100 mA @ ≥ 12 V			
Operate/Release Time	5 ms (typical)/1 ms (typical)			
Mechanical/Electrical Endurance	30 x 10 <sup>6</sup> ops./1 x 10 <sup>5</sup> ops.			
Isolation				
Intra-module Isolation, Field to Logic	2000 Vdc			
Power Requirements				
Consumption	1.6 W	0.8 W	1.6 W	

## ■ Dimensions (Units: mm)

### VPD-130-H

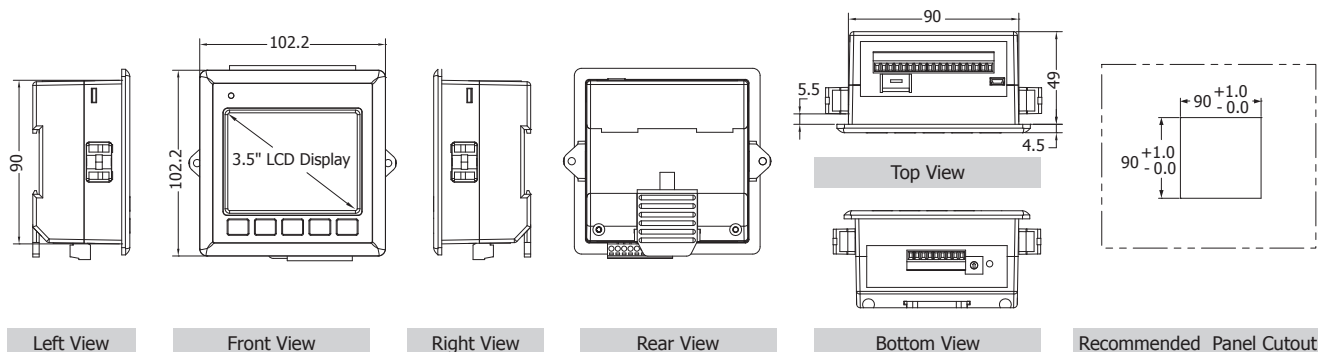

### VPD-130N-H

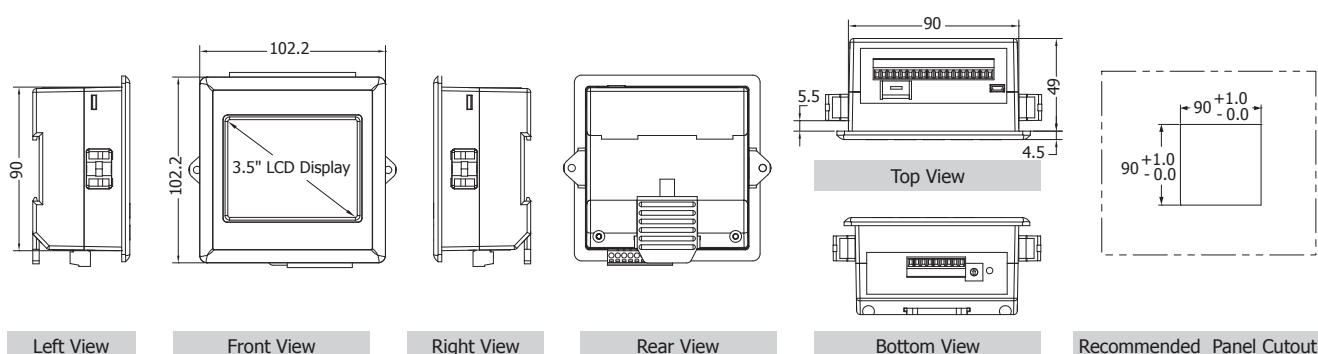

## ■ Ordering Information

VPD-130-H CR	3.5" Touch HMI device with RS-232/RS-485, USB, RTC, Rubber Keypad (RoHS)
VPD-130N-H CR	3.5" Touch HMI device with RS-232/RS-485, USB, RTC (RoHS)

## ■ Accessories

CA-USB10	USB to 5P Mini-USB, 28AWG, 1.5 m
MDR-60-24 CR	24 Vdc/2.5A, 60 W Power Supply with DIN-Rail Mounting (RoHS)
DIN-KA52F CR	24 Vdc/1.04 A, 25 W Power Supply with DIN-Rail Mounting (RoHS)