


# R15IK7T-POC3

## 15" Panel PC (Intel 7<sup>th</sup> Generation Core i3/i5/i7 Processor)

Mechanical Design


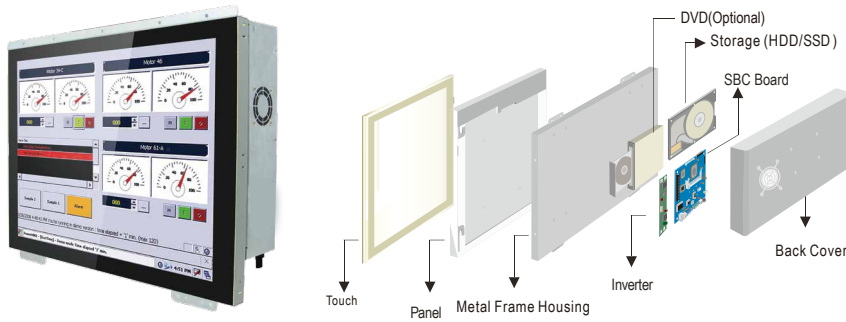


Open Frame

### Features:

- 15" 1024 x 768 Resolution
- Intel 7<sup>th</sup> Generation Core i3/i5/i7 processor (Kabylake)
- Flexible storage devices, one 2.5-inch HDD and one SSD
- Multiple I/Os, Two Serial Ports and Four USB 3.0 Ports
- 12V DC Power input
- DP Support 4096x2304@60Hz
- HDMI Support 4096x2304@24Hz

### Modularized Construction Dimensions

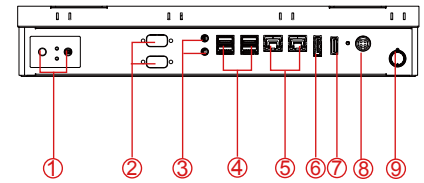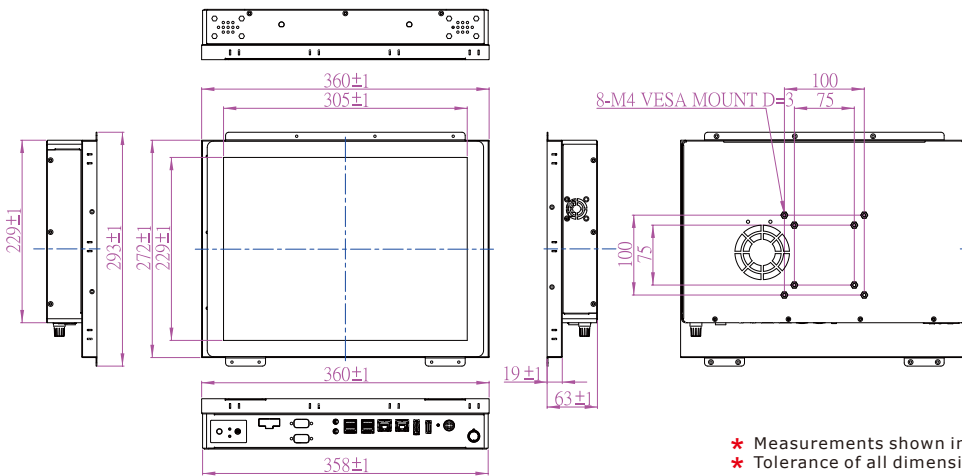

1. OSD Membrane
2. 2 x RS232/422/485
3. Mic In/Line Out
4. 4 x USB3.0
5. LAN
6. DP 1.2
7. HDMI 1.4
8. 12V DC in
9. Dimming Knob

- \* Measurements shown in mm
- \* Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1 mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm
- \* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

### Specifications

#### System Specifications

- CPU : Intel® Core™ i7-7700T Processor, 2.9 GHz  
Intel® Core™ i5-7500T Processor, 2.7 GHz  
Intel® Core™ i3-7100T Processor, 3.4 GHz
- System Chipset : Intel® H170
- System Memory : 1 x SO-DIMM, Max 16GB DDR4 2400 MHz default 4GB
- Storage : 1 x M.2 SSD, Max 512GB  
1 x 2.5" 500GB HDD (default)
- Audio : Realtek HD Audio Codec
- Network : Intel® Ethernet Controller I211-AT + Intel® Gigabit Ethernet PHY I219-LM

#### Input / Output

- Serial Ports : 2 x RS232/422/485(default RS232)
- USB Ports : 4 x USB 3.0
- Ethernets : 2 x RJ45-10/100/1000 Mbps
- DP Port : 1 x DP 1.2
- HDMI Port : 1 x HDMI 1.4
- Audio : Mic in, Line out

#### Power Management

- Power Input : 12V DC IN (Lockable Power Jack)
- Power Consumption : 58W (typ.)(Max.backlight & high CPU load)

#### Accessories

- External Adapter : 110~240V Ac-in Power Adapter

#### Display Specifications

- Size/Type : 15" TFT
- Resolution : 1024x768
- Contrast Ratio : 2000:1 (typ.)
- Brightness : 250 nits
- Viewing Angles : -88~88 (H); -88~88 (V)
- Max Colors : 16.2M (6bits+FRC)

#### Environment

- Operating Temperature : 0°C to 50°C
- Operating Humidity : 10% to 90% (non condensing)

#### Security Support

- Trusted Platform Module (TPM 2.0)

#### Order Options

- |                         |                                     |
|-------------------------|-------------------------------------|
| Mechanical : Open Frame | Storage : 2.5"HDD/2.5" SSD/ M.2 SSD |
| Touch : P-CAP           | RAM : DDR4 2400 Max 16GB            |
|                         | OS : Windows 10 IoT Enterprise      |

#### Expansion Slot

- 2 x M.2(1 for WiFi, 1 for SSD), 1 x PCIe 16(Optional)

\*Customized housing required if you need to have the PCIe expansion