


RM-N8M Series

SMARC 2.0 CPU Module

Wide-Temperature SMARC™ 2.0 Module with NXP ARM® Cortex-A53/Cortex-M4 i.MX 8M Dual/Quad 1.5GHz Processor

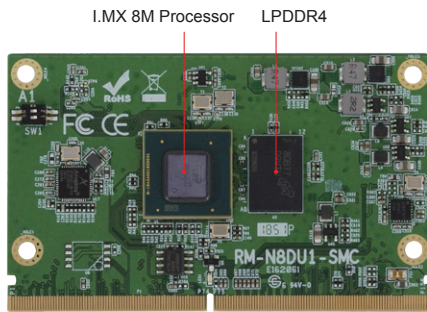

System

Form Factor	SMARC™ V2.0
Processor	NXP i.MX 8M Dual/Quad Cortex-A53 and Cortex-M4, 1.5GHz
System Memory	3GB LPDDR4 on board
Flash Memory	8GB eMMC on board (optional 16/32/64 GB)
Display	1x MIPI-DSI 4-lane up to 1920 x 1080 at 60Hz 1x HDMI V2.0a, up to 4K, supports HDCP2.2 and HDCP1.4
Video Codec	<ul style="list-style-type: none"> 4Kp60 HEVC/H.265 main, and main 10 decoder 4Kp60 VP9 decoder 4Kp30 AVC/H.264 decoder 1080p60 MPEG-2, MPEG-4p2, VC-1, VP8, RV9, AVS, MJPEG, H.263 decoder
Graphics	<ul style="list-style-type: none"> GC7000Lite OpenGL ES 1.1, 2.0, 3.0, 3.1, Open CL 1.2, and Vulkan
Audio Interface	2x I²S, 1x SPDIF
LAN	1x GbE LAN
USB	2x USB3.0/USB2.0 with OTG interface
Image Capture Interface	2x MIPI-CSI2 4-lane each
Serial Interface	4x UART, 2x SPI
Media Interface	2x High-speed MMC/SDIO (MMC 8-bit, SDIO 4-bit)
PCI-E	2x PCI-E (x1) Gen2
SATA	N/A
GPIO	12x GPIO

Features

- With NXP Cortex-A53/Cortex-M4, i.MX 8M Dual/Quad 1.5GHz processor
- 3GB LPDDR4, 8/16/32/64GB eMMC
- Rich peripheral I/O support
- Validated with Yocto v2.5 and Android 9
- Long life time supply with NxP solution
- Compliant with SGeT standard SMARC™ V2.0

I²C	4x I²C
CAN Bus	N/A
Dimensions	82mm x 50mm (3.2" x 2")
Environment	Humidity: 0 % to 90 % RH at 60° C (non-condensing) Shock: Non-operating: 1G, 15 mins (x-, y-, z-axis) Vibration: Non-operating: 3 Hz to 500 Hz, 15 mins
Operating Temperature	Consumer Grade : 0°C ~ 70°C Industrial Grade : -40°C ~ 85°C
OS Support	Yocto 2.5 (Kernel 4.14.62) Android 9 (Kernel 4.14.62)
Certification	CE/ FCC Class B

Ordering Information

RM-N8M-D308	SMARC 2.0 CPU module, Cortex-A53 i.MX 8M Dual 1.5GHz, 3GB LPDDR4, 8GB MLC eMMC
RM-N8M-D308I	Industrial grade SMARC 2.0 CPU module, Cortex-A53 i.MX 8M Dual 1.3GHz, 3GB LPDDR4, 8GB MLC eMMC
RM-N8M-Q316	SMARC 2.0 CPU module, Cortex-A53 i.MX 8M Quad 1.5GHz, 3GB LPDDR4, 16GB TLC eMMC
RM-N8M-Q316I	Industrial grade SMARC 2.0 CPU module, Cortex-A53 i.MX 8M Quad 1.3GHz, 3GB LPDDR4, 16GB TLC eMMC
RP-103-SMC (Carrier Board)	3.5" SMARC 2.0 carrier board, 2-CH LVDS, HDMI, 2x CSI, DSI, GbE, RS-234/422/285, USB3.0, M.2 Key-E (2230), Mini PCI-E w/ SIM socket, USB OTG, SATA, CAN, Audio/Speaker out/HP&MIC, MicroSD and 12~24VDC

ICP Electronics
Australia Pty Ltd

TEL: 02 9457 6011
sales@icp-australia.com.au
www.icp-australia.com.au



Proudly Australian-Owned Since 1999