

# SI-324-N

## Mid-Range Signage Player

AMD Ryzen™ Embedded V-Series Fanless Signage Player with AMD Vega GPU and Four HDMI



### Features

- iCONTROL intelligent energy-saving & Observer remote monitoring technologies
- AMD Ryzen™ Embedded V-series
- Vega GPU with up to 8 Compute Units
- 4x HDMI 2.0 with independent audio output support
- Built-in hardware EDID emulation function with software setting mode
- 2x DDR4-2400 SO-DIMM, dual channel, Max. 32GB
- 1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth, 4G LTE or capture card options
- 1x M.2 E-Key (2230) for Wi-Fi, Bluetooth, options
- 1x M.2 M-Key (2280) for storage
- Compact and fanless design


### Specifications

System Mainboard	MBD324
CPU	AMD Ryzen™ Embedded V1605B 2.0GHz/3.6GHz
CPU Socket	FP5 BGA package, 35mm x 25mm, 0.8mm pitch
Chipset	AMD integrated SoC
Memory	2x DDR4-2400 SO-DIMM, Dual channel, Max. 32GB
Graphics	Next-Gen AMD Radeon™ HD GPU integrated
LAN	2x Realtek RTL8111H Gigabit LAN controller
Expansion Slots	1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth, 4G LTE or capture card options 1x M.2 E-Key (2230) for Wi-Fi, Bluetooth, options 1x SIM card slot
I/O Interface	4x HDMI 2.0 with hardware EDID emulation 2x USB 3.0, 1x USB 2.0 2x RJ45 for Gigabit LAN 1x RJ45 for RS-232 serial port 1x Micro jack audio connectors for Line-out Power / HDD LED, 1x power button 1x Power jack connector
Auto Control and Monitoring	Watchdog Timer: 256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	+12V DC-in
Construction	Aluminum + SGCC
Weight	1.5kgs (3.31lbs)
Chassis Color	Black & white
Storage	1x M.2 M-Key 2280 (SATA signal only)
Power Supply	84W power adaptor
Mounting	Standard system bracket
Dimensions	215.8mm(W) x 164mm(D) x 45mm(H) 8.49"(W) x 6.45"(D) x 1.77"(H)
Operating Temperature	0°C ~ 45°C (32°F~113°F)
Storage Temperature	-20°C to 80°C (-4°F~167°F)
Relative Humidity	10%~90% (non-condensing)
Vibration	M.2: 5 grms / 5~500Hz / random operation
Certification	CE, FCC Class B, cULus & CCC
Operating System	Win10 IoT Enterprise 64-bit Linux Ubuntu 64-bit

### Ordering Information

SI-324-N	Signage Player with MBD324 w/ AMD Ryzen™ Embedded V1605B 2.0GHz/3.6GHz; 2x 4GB DDR4 2400 SO-DIMM memory, M.2 128GB, 84W power adaptor (RoHS)
----------	--

### Dimensions

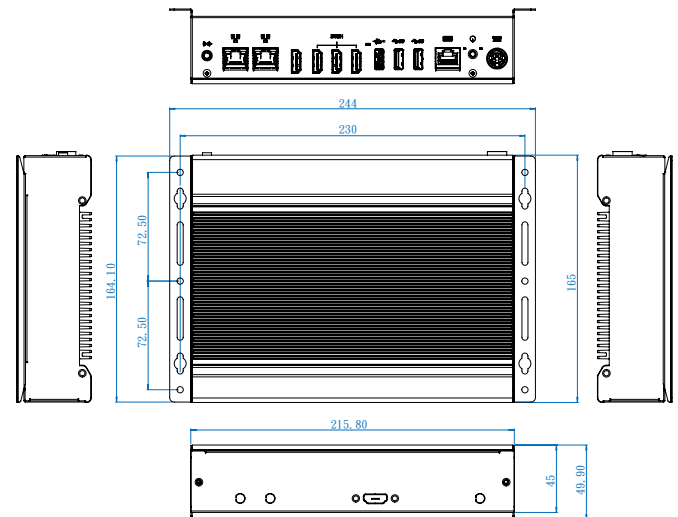

ICP Electronics  
Australia Pty Ltd

TEL: 02 9457 6011  
sales@icp-australia.com.au  
www.icp-australia.com.au

Proudly Australian-Owned Since 1999

