


12.1" P-Cap Chassis Display - R12L100-PCM2(HB)

Features

- 12.1" 1024 x 768 Resolution
- Projected Capacitive Multi-Touch (P-Cap)
- Front IP65 Water and Dust Proof
- VGA input and variety of optional connectors
- USB port for touch
- Stylish and elegant design

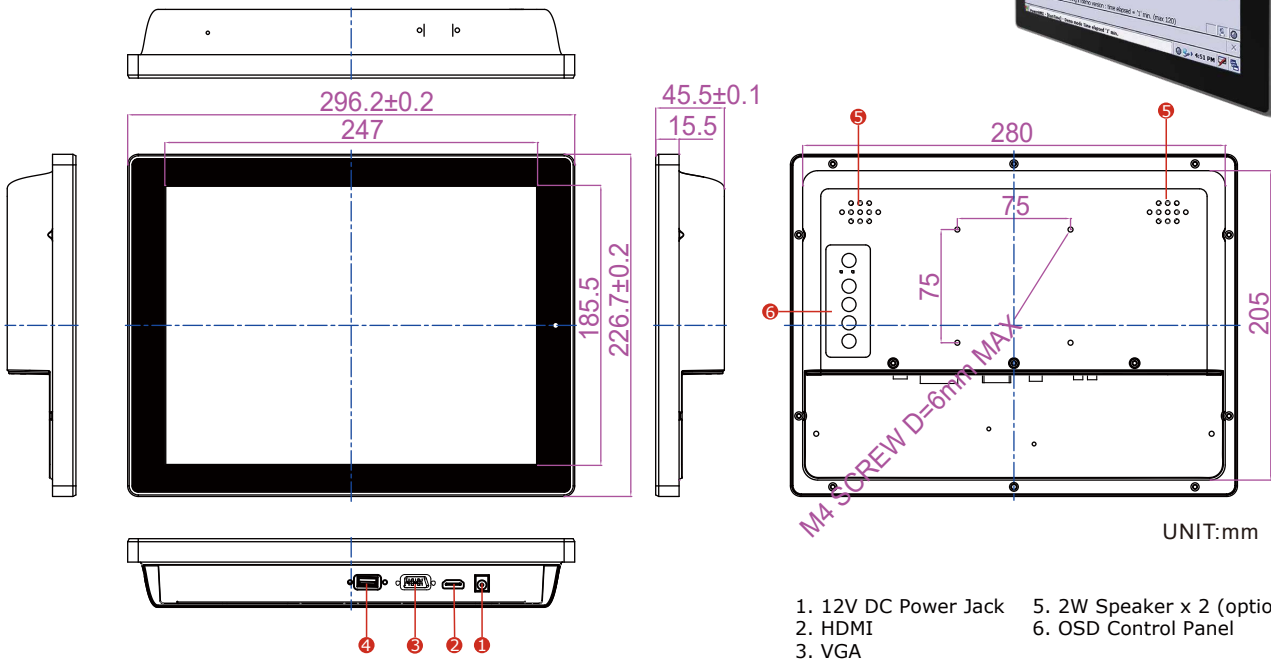

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

Display Spec :	
• Size/Type	: 12.1" TFT (4:3)
• Resolutions	: 1024x768
• Brightness(cd/m ²)	: 500 cd/m ² (typ.) Optional for High brightness 1000 cd/m ² (typ.)
• Contrast Ratio	: 1000 : 1 (typ.)
• Viewing Angle	: -89~89(H); -89~89(V)
• Active Display Area(mm)	: 245.76(H) x 184.32 (V)
• Pixel Pitch(mm)	: 0.240 (H) x 0.240 (V)
• Touch	: Projected Capacitive Touch

Input Specifications :	
• Input Ports	: 1 x VGA 1 x HDMI 1 x 12V DC Power Jack
• USB Port (Touch)	: 1 x USB 2.0
• Speaker(optional)	: 2 x 1 Watt speaker

Mechanical Specification :	
• Mounting	: VESA Mount (75 x 75mm)
• Dimensions (W x H x D)	: 296.2 x 226.7 x 45.5 (mm)

Power Specification :	
• Power Source	: 12V DC, with External AC Adapter (100~240 AC)
• Power Consumption	: 18 W typical, normal operation

Accessories	
• Accessories	: Power AC-DC Adapter(100V~240V) : VGA cable (1.8m) : HDMI cable (2m) : USB cable (1.8m)

Environment Considerations :	
• Operating Temperature	: -10 °C to 55 °C
• Operating Humidity	: 10% to 95% (non-condensing)
• IP Rating	: Front IP65