



Features

- Fanless Design
- Intel® Atom D2550 1.8G Processor
- Onboard DDR3 2GB, option 4G
- 11~32V DC wide-ranging power input
- 5 sides IP65
- 5-Wire Resistive Touch Screen



Specifications

System	
Processor	Intel Atom D2550 1.8G Processor
System Chipset	Intel NM10 Express
System Memory	Onboard DDR3 2GB(Default), option 4G


IO Port	
USB	2 x USB 2.0 type A
Serial/Paralle	1 x RS-232/422/485 selectable default RS-485 DB9 (COM 1) 1 x RS-232 DB9 (COM 2)
Audio	1 x Line out, phone jack
Graph	None
LAN	2 x GbE RJ-45
Digital I/O	None
KB/MS	None
Membrane control	None
Power	1 x 3 pins terminal block connector 1 x Power switch
TB-528C1U2PS1	2 x USB 1 x RS-232 (COM 5)

Storage Space	
HDD	1 x 2.5" HDD space
Movable device	1 x Internal SD slot on board

Expansion	
On board expansion bus	1 x Mini PCIe half size Option wifi/BT with Antenna

Display	
Display Type	12.1" TFT-LCD
Max. Resolution	800x600
Max. Color	262K
Luminance (cd/m ²)	350
View Angle	160/140
Contrast	800:1
Backlight Lifetime	50,000 hrs

Dimensions

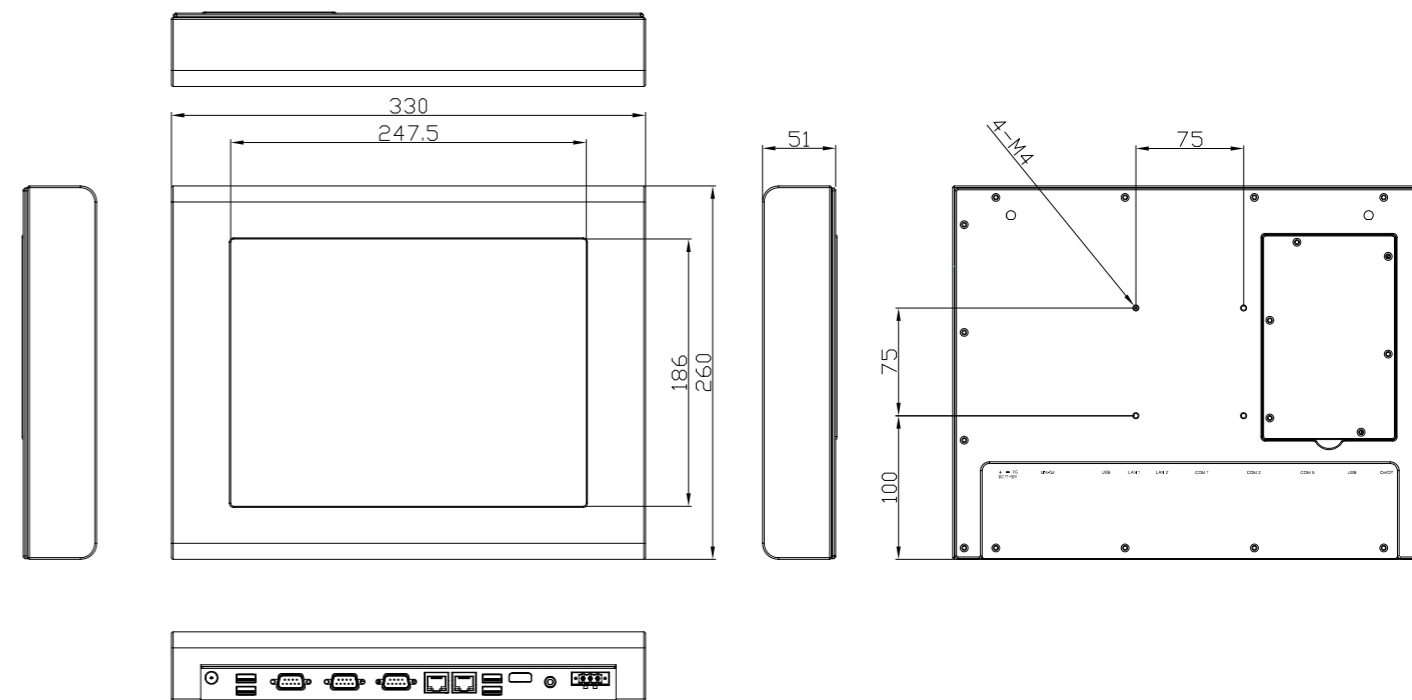

Touch Screen	
Type	Resistive Touch
Interface	Default RS-232
Light transmission (%)	80%

Power	
Power input	11~32V DC
Power Consumption	Max: 15.6W

Mechanical	
Construction	Stainless Steel
IP Rating	5 sides IP65
Mounting	VESA 75 x 75
Dimension (mm)	330 x 260 x 51
Net Weight (Kgs)	4.3

Environmental	
Operating temperature(°C)	0~50°C (with HDD)
Storage temperature(°C)	-30~70°C
Storage humidity	10 to 90% @ 40°C, non-condensing
Certification	CE/FCC class A

Operating System Support	
Microsoft Windows 7 pro for embedded, Windows embedded standard 7	

Ordering information	
APC-3284AT-01	12.1" SVGA 5 sides IP65 Intel Atom D2550 1.8G fanless panel PC, 2GB DDR3 memory 2.5" SATA2 320GB HDD, DC 11~32V power input with adaptor, stainless steel enclosure